



## FRAMED WEATHER LOUVRES

**K**ingfisher framed weather louvres provide a well designed and robust cost effective solution for extract and intake air.

The 45 degree blades are set at a 30mm pitch for excellent weatherability and low airflow resistance.

Available for internal or external use as framed units with either a 38mm surrounding flange for wall mounted fixing or recessed enabling multiple panel assemblies to be used together.



*Flanged frame*



*Recessed frame*

## FRAMED WEATHER LOUVRES

.....

### Construction

Manufactured from extruded aluminium sections with mitred and welded corners. Available in mill finish, satin anodised or powder coated.

Louvres can be also supplied with 4mm large insect mesh which will also provide bird resistance.

For heavy duty applications, additional concealed louvre supports can be fitted. Please state when ordering.

### Size

Available in sizes from 300mm x 300mm up to 2000mm wide and 1500mm high.

### Performance

#### Rain rejection

The louvre system has been tested by BSRIA to BS EN 13030: 2002 and achieves Class B being 98.6% effective.


#### Airflow performance

The louvre system has been tested to achieve a discharge coefficient of Cd 0.3.

### Ordering

Provide builders opening dimensions starting with width followed by height.

#### Flanged frame

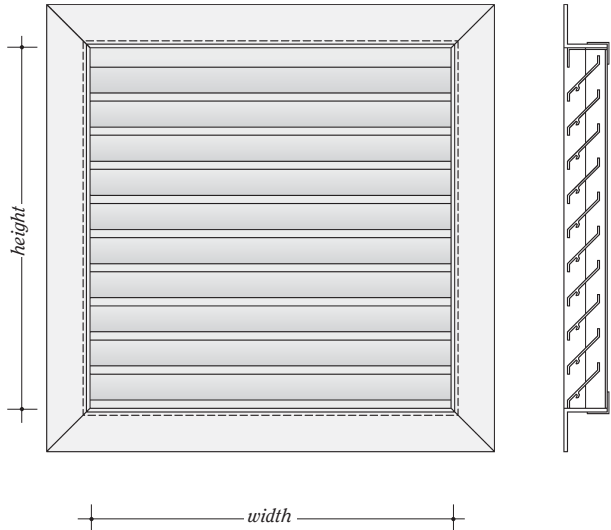

#### Recessed frame



.....

### KINGFISHER LOUVRE SYSTEMS LTD

Plymouth Avenue, Brookhill Industrial Estate, Pinxton, Nottingham NG16 6NS.  
Telephone: 01773 814102 Fax: 01773 814103  
Email: [info@kingfisherlouvres.com](mailto:info@kingfisherlouvres.com) Web: [www.kingfisherlouvres.com](http://www.kingfisherlouvres.com)

Kingfisher Louvre Systems Ltd maintains a policy of continuous development and reserves the right to amend product specifications without notice.

**BPD**

A member of the Building Product Design Group

